

SPRAYDOWN

QUICKFLOW CLASS A1 VANE SEPARATOR



PRODUCT INFORMATION

PERFORMANCE

- CLASS A1 SEPARATOR
- INGRESS PROTECTION: IP65* AND IPX5
- >99.9% SEPARATION EFFICIENCY
- TESTED TO BS EN 13030:200
- TEMP RANGE -30°C TO +60°C
- INDEPENDENTLY TESTED BY BSRIA & CRT

APPLICATIONS

- ENGINE INTAKES
- HEVAC EQUIPMENT
- COOLING COILS
- MARINE & OFFSHORE
- CONTAINERS

FEATURES


- HIGH WATER CAPTURE
- VERY LOW PRESSURE DROP (BELOW)
- COST EFFECTIVE DESIGN
- CORROSION RESISTANT
- BESPOKE SIZING
- EXTERNAL GRADE PVC

LAYOUT

- BLADES : 1.5MM
- DEPTH : 125MM
- MATL: EXTERIOR GRADE PVC

PRESSURE DROP CURVES

SEPARATOR ONLY (IPX5)

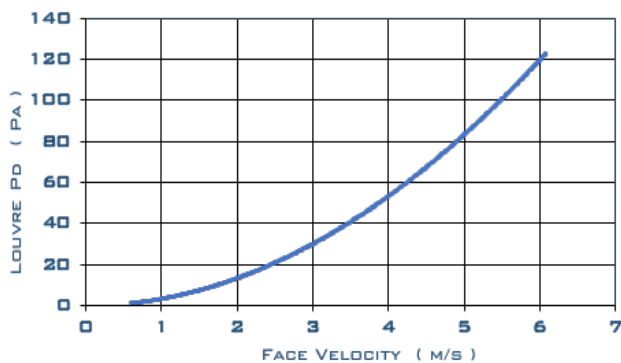

SEPARATOR WITH G4 FILTER (IP65*)

